




VERSION	CHANGE CONTENT	DATE
A00	first issue	2006/03/09

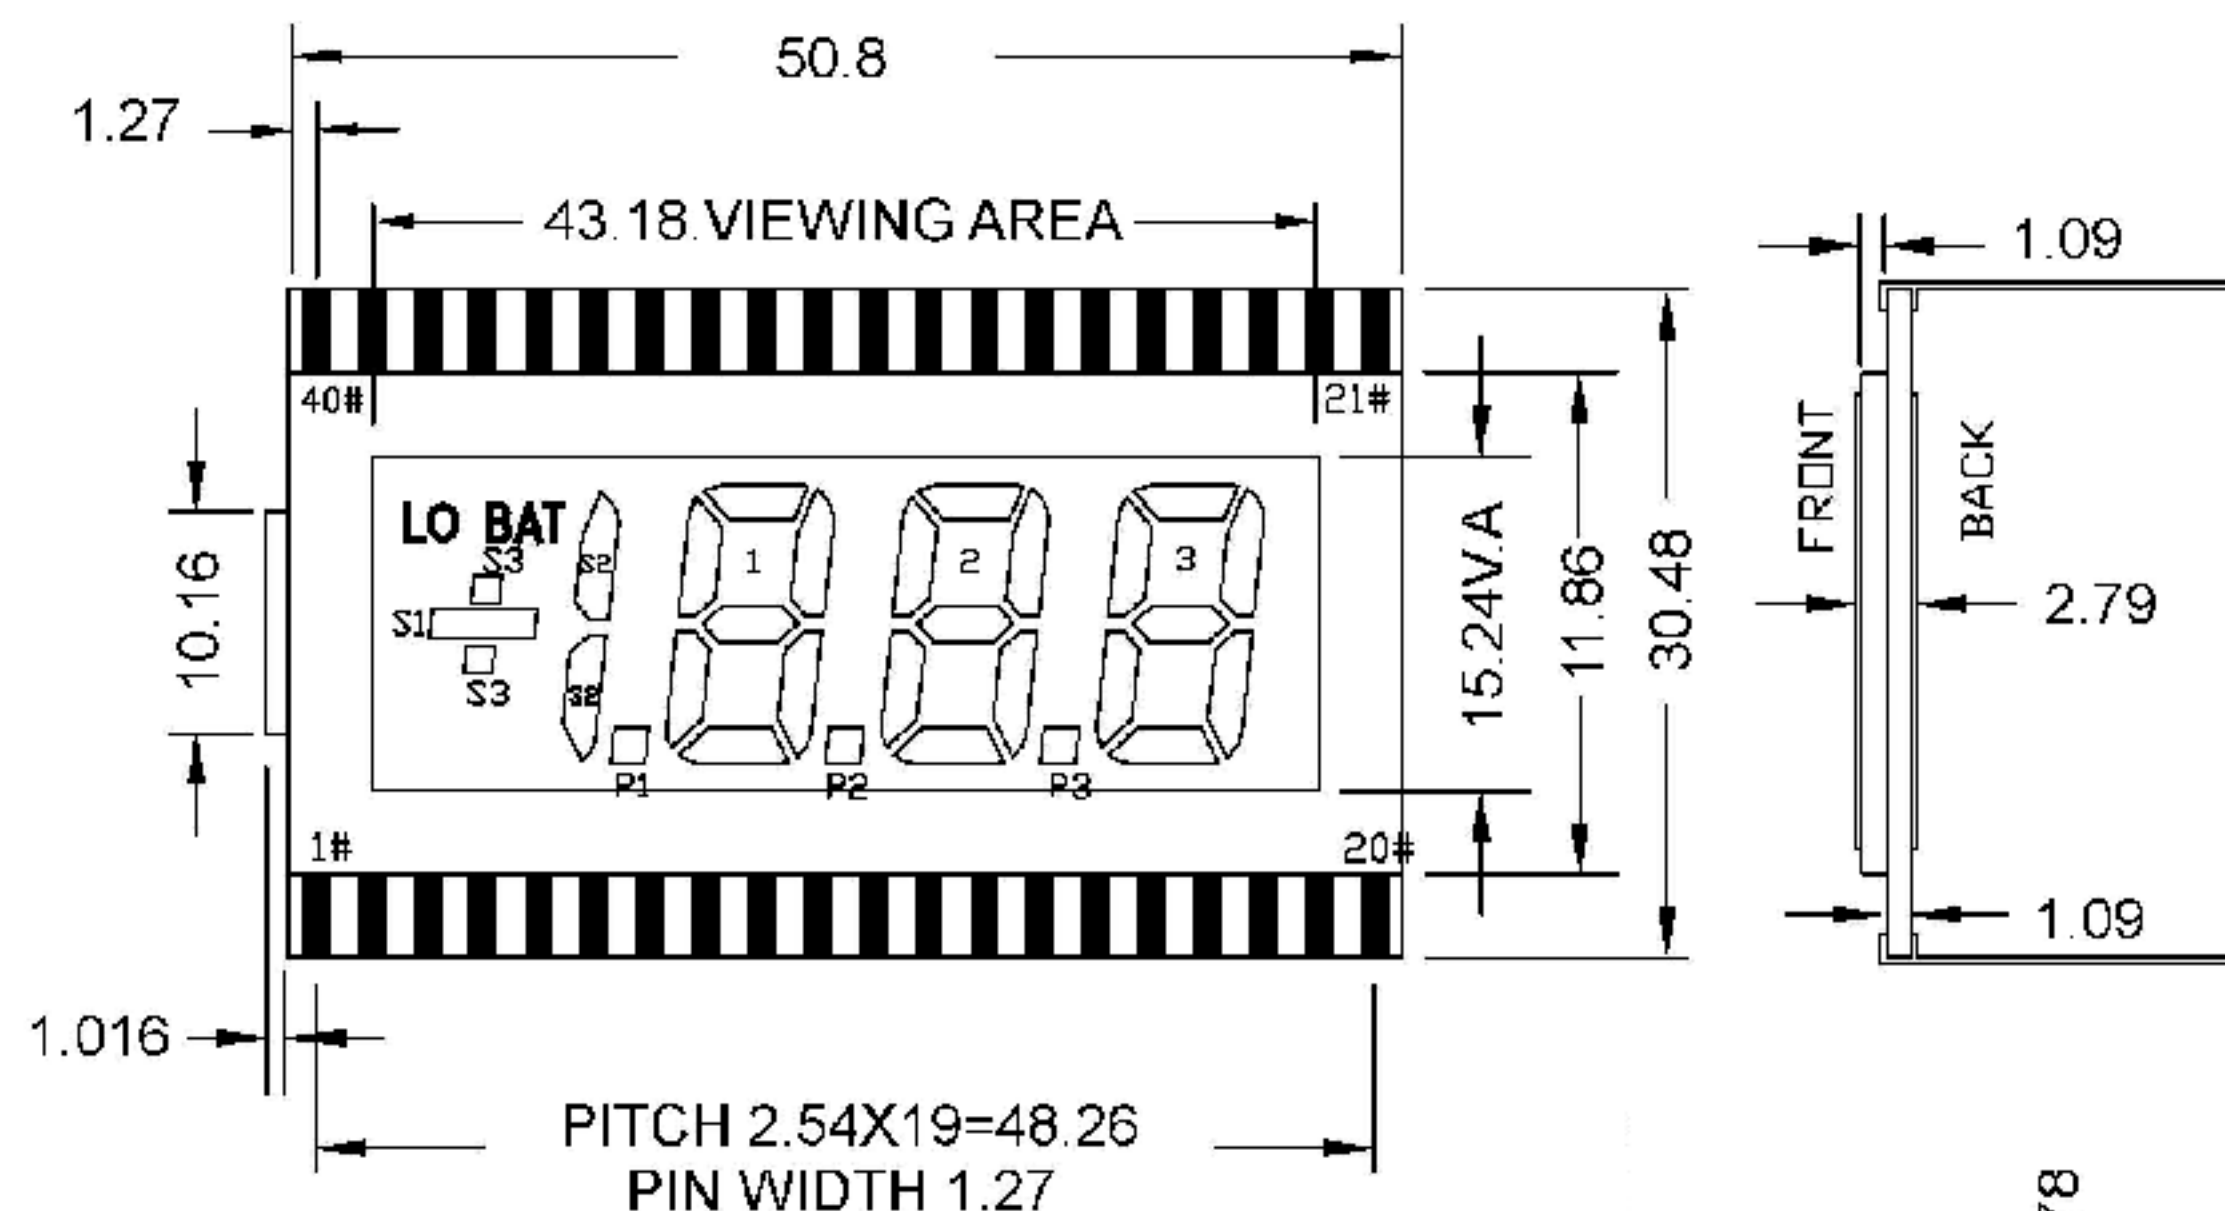

PIN	COM	PIN	COM
1	COM	21	A3
2	S1	22	F3
3	S2	23	G3
4	-	24	B2
5	-	25	A2
6	-	26	F2
7	-	27	G2
8	P1	28	-
9	E1	29	B1
10	D1	30	A1
11	C1	31	F1
12	P2	32	G1
13	E2	33	-
14	D2	34	-
15	C2	35	-
16	P3	36	-
17	E3	37	-
18	D3	38	LOBAT
19	C3	39	S3
20	B3	40	COM

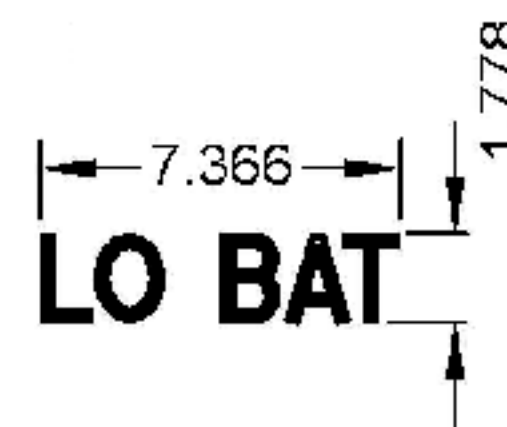

1. Drive VOLTAGE: 3.0V
2. LOGIC CURRENT: 300~400uA
3. VIEWING ANGLE: 6:00
4. DISPLAY TYPE: TN, REFLECTIVE/POSITIVE
5. INTERFACE MODE: Metal
6. OPERATING TEMP: -0°~+50°C
7. STORAGE TEMP: -10°~+60°C
8. BACKLIGHT CURRENT: 0

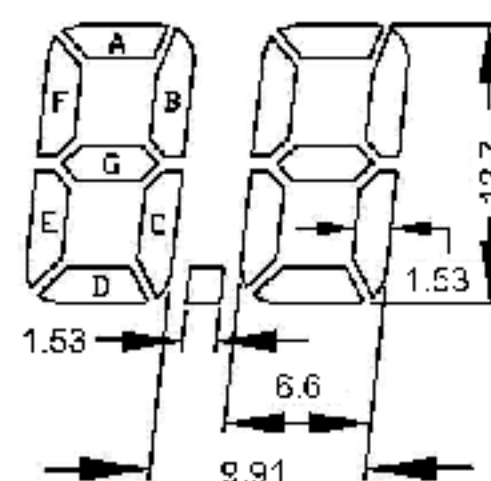

SHEET	1 OF 1	C/D	
TOLERANCE	0.01Inch		
APP			THD6333A
CHK			
DWN			
		PROJECTION	